


ADDENDUM #4

C20004 – US 101/BLOSSOM HILL ROAD INTERCHANGE IMPROVEMENT

ISSUE DATE: MAY 13, 2020


Notice is hereby given that the following revisions, additions, and modifications are hereby incorporated into the Invitation for Bids (“IFB”).

Approved By

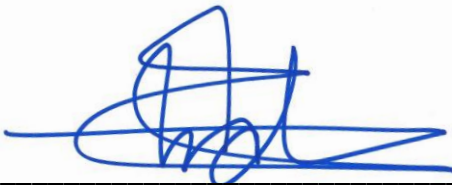

Ehab Azab
Construction Contracts Administrator

Approved for Release:



Daren Gee, P.E.
Construction Contracts Administration Manager

THIS ADDENDUM CONTAINS 3 PAGES
(Including attachments)

VOLUME 1 – CONTRACT DOCUMENTS

APPENDIX A INSURANCE REQUIREMENTS

1. **DELETE** Item 5 of **Section B “Builder’s Risk Insurance”** on page A-3 to its entirety, and **REPLACE** it with the following:

“The Builder’s Risk policy must be endorsed to name VTA as Loss Payee as its interests may appear”.

VOLUME 3 – CONTRACT DRAWINGS/PLANS (PART 2)

Sheet 211 – Drawing ECL-1 Erosion Control Legend

2. **REPLACE** drawing ECL-1 with the attached revised drawing ECL-1.

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
04	SCI	101	R28.4/R28.9	211	345

Megan Ann Cronan 03-05-20
REGISTERED CIVIL ENGINEER DATE

March 6, 2020
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER
MEGAN ANN CRONAN
No. 85735
Exp. 9/30/20
CIVIL
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

HMH 1570 OAKLAND ROAD SAN JOSE, CA 95131
CITY OF SAN JOSE DEPARTMENT OF TRANSPORTATION 200 E. SANTA CLARA STREET SAN JOSE, CA 95113

EROSION CONTROL TYPE 1

SEQUENCE	ITEM	MATERIAL		APPLICATION RATE	REMARKS
		DESCRIPTION	TYPE		
STEP 1	COMPOST	COMPOST	FINE	270 CY/ACRE	
STEP 2	FIBER ROLLS	FIBER ROLLS	8" TO 10" Dia	AS SHOWN	TYPE 2 FIBER ROLL INSTALLATION
STEP 3	HYDRAULIC MULCH	FIBER	50% WOOD 50% CELLULOSE	400 CY/ACRE LB/ACRE	
		TACIFIER	GUAR	125 LB/ACRE	

EROSION CONTROL TYPE 2

SEQUENCE	ITEM	MATERIAL DESCRIPTION	APPLICATION RATE
STEP 1	COMPOST	COMPOST	270 CY/ACRE
STEP 2	SEED MIX	SEED	62 LB/ACRE
		FERTILIZER	600 LB/ACRE
STEP 3	MULCH	WOOD CHIP MULCH	400 LB/ACRE CY/ACRE

SEED MIX

BOTANICAL NAME (COMMON NAME)	PERCENT GERMINATION (MINIMUM)	POUNDS PURE LIVE SEED PER ACRE (SLOPE MEASUREMENT)
ACHILLEA MILLEFOLIUM (WESTERN YARROW)	50	2
CAREX PRAEGRACILIS (CLUSTERED FIELD SEDGE)	30	10
BARLEY (HORDEUM BRACHYANTHERUM)	70	50

ADDENDUM #4
5/12/2020

EROSION CONTROL LEGEND
SCALE: 1" = 50'

ECL-1

APPROVED FOR EROSION CONTROL WORK ONLY

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION
Caltrans
CONSULTANT FUNCTIONAL SUPERVISOR
WILLIAM J. WAGNER
CALCULATED-DESIGNED BY
CHECKED BY
REVISOR BY
DATE REVISED

LAST REVISION DATE PLOTTED => 06-MAR-2020
02-25-19 TIME PLOTTED => 13:33